

Micronet®
Making Communication Easier




Micronet SP214D

4-port USB KVM Switch

Micronet SP214D 4-port KVM switch can share one set of keyboard, mouse, monitor and audio up to four workstations. It catches up the new technical trend to save the two PS/2 connectors and use one USB connector to set it up. From workstation, use the specified KVM cable to link PC's USB port to SP214D. The USB connection will be defined as keyboard and mouse. Furthermore, the audio can be switched with keyboard/mouse simultaneously or stay tune on the specified workstation. It is convenient for audio designer to switch audio channel or listen music for entertainment. SP214D provides the utility to define hot-key and auto-scan period, and shows the host number in the task bar. It provides you more convenient way to switch among the four workstations.

Key Features

- 4-port KVM Switch share one set of keyboard, mouse, monitor plus audio and Mic
- Channel selection by push button, keyboard hotkeys and Windows-based utility
- USB console support for USB keyboard and mouse
- Support universal and user definable hotkeys
- Audio and Microphone switching for uninterrupted multimedia experience across multi-platforms
- LED indicators for easy status monitoring
- Independent/simultaneous switching of both PC and audio/mic channel
- High VGA resolution 2048 x 1536
- Multi-platform support for PCs and Macintosh G3/G4 MAC, iMAC
- Windows-based utility
- Hot-plugging PCs for maintenance without powering down the KVM Switch or PCs
- USB interface power
- 4 detachable USB KVM cables and 4 Audio/Mic cables in box

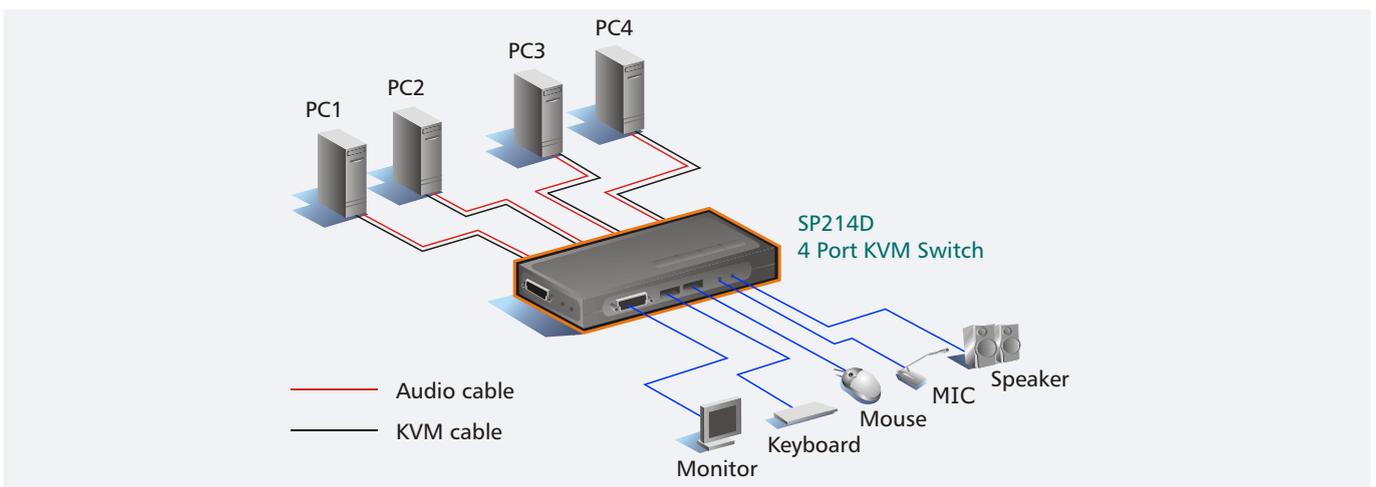

KVM Switch

SPECIFICATION AND PRODUCT FEATURES

Model	SP214D
Computer Connections	4
LED Indicator	1 per port
Installation Type	Desktop
Methods of Control	Hot-key, Push buttons
Automatic Scan Interval	1~99
Compatible OS	Compatible with Windows, Linux and and Macintosh G3/G4 MAC, iMAC operating systems
VGA Resolution	2048 x 1536
Console Connector	Video: HDB-15(Female) Keyboard: USB Mouse: USB 3.5mm audio in/out jack 3.5mm mic in/out jack
Computer Connector	HDB 15-pin (Female) 3.5mm audio in/out jack 3.5mm mic in/out jack
Cable Type	2-in-1 KVM cable
Power	USB interface power
Operating Temperature	0 °C ~ 50 °C
Operating Humidity	0%~80%, non-condensing
Dimension (mm)	164 x 72 x 26
Weight (kg)	0.189
Emission	FCC, CE

The product specifications are subject to change without prior notice.

ORDERING INFORMATION

Model	Description
SP214D	4-port USB KVM Switch with 4 KVM cables and 4 audio cables
C200H-1	KVM Cable for SP212D/SP214D, 1.8M
C200H-3	KVM Cable for SP212D/SP214D, 3M
C200H-5	KVM Cable for SP212D/SP214D, 5M
C200F-1	Audio Cable for SP214C/SP214D, 1.8M
C200F-3	Audio Cable for SP214C/SP214D, 3M
C200F-5	Audio Cable for SP214C/SP214D, 5M



SP214D 4-port USB KVM Switch

- ① Connect for PC1 to PC4
- ② PCs Switching Button
- ③ Connect for Console USB Keyboard & USB Mouse
- ④ Connect for Console Video

COMPANION PRODUCTS

Consider the following Micronet products as a factor in your network planning.

Ethernet Switch
Industrial Ethernet
IP Surveillance
Wireless LAN
VDSL • ADSL and Broadband
IP Telephony
KVM Switch
Network Appliance
Structured Cabling System

Copyright © 2012 Micronet Communications Inc. All technical information in this document is subject to change without prior notice. Micronet, EtherFast and MicroView are registered trademarks of Micronet Communications Inc. All other trademarks and registered trademarks are properties of their respective holders.

Distributor:

Micronet Communications Inc.

E-mail: sales@micronet.com.tw; support@micronet.com.tw Web: www.micronet.com.tw