


Model No. SP1106UM

Cat6A (U/UTP) Bulk Cable

305 m (1,000 ft.), Solid

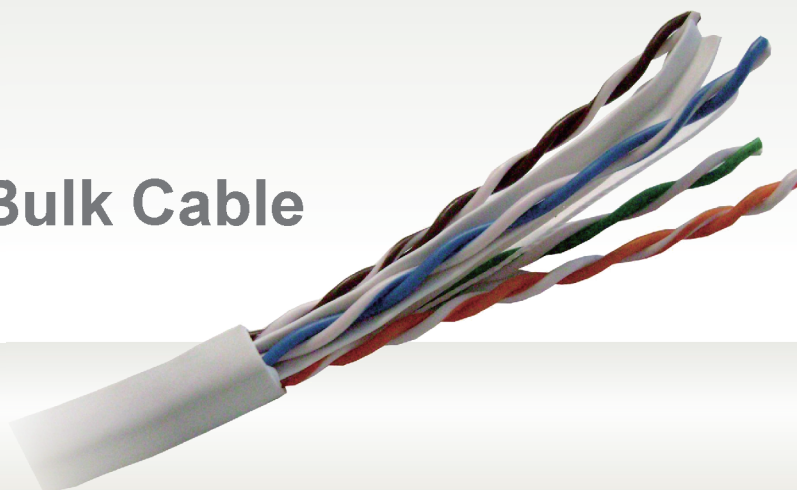

Introduction

Micronet SP1106UM, the Cat6A U/UTP bulk cable, provides high frequency bandwidth of 650MHz and enhances the best efficiency to support 10 Gigabit Ethernet applications.


With Cat6A characteristics, Micronet SP1106UM improves to reduce the near-end crosstalk noise and high alien crosstalk noise in high frequency. Furthermore, it meets very high performance standard of ANSI/TIA-568-C.2, ISO/IEC 11801 and IEC 61156-5.

With the very high performance specifications, Micronet SP1101AIM is your best solution choice for data, voice, and video applications.


Key Features

- Provides ultimate data delivery rate with **very high frequency bandwidth up to 650MHz**
- Ideal solution for **10 Gigabit Ethernet(10G BASE-T)** applications
- Maximizes the distance of data delivery in 10G BASE-T Ethernet up to **100 meters**
- Meets requirements for **IEEE 802.3an 10 Gigabit Ethernet**
- Eliminates alien crosstalk noise efficiently with **zigzag jacket design**
- Meets **ANSI/TIA-568-C.2, ISO/IEC 11801 and IEC 61156-5 standards**
- Round and smooth jacket without twisted strip
- **Length footage** printed on cable from 305m to 0m to track remaining cable available for the next job
- Suitable for **horizontal and building backbone cable, digital and analog for data/video/audio applications, 10G BASE-T Ethernet, CDDI/ATM/Token Ring, and PoE application**

Application

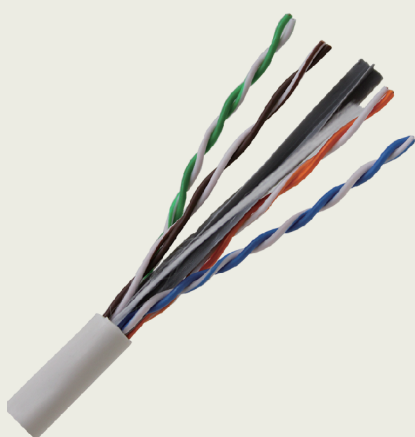

Cat6A

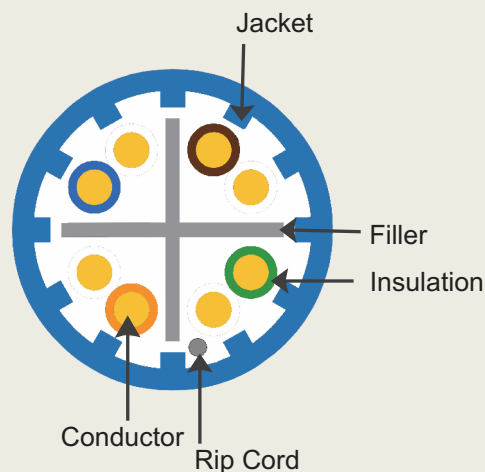

Cat6A (U/UTP) Bulk Cable

SPECIFICATION AND PRODUCT FEATURES			
Model	SP1106U M		
Category	Cat6A		
Cable Type	U/UTP		
Wiring Standard	IEC 61156-5(Ed2.1), ANSI/TIA-568-C.2& ISO/IEC 11801 (Ed2.2)		
FlameTest	UL1685(CM)		
Sweep frequency	650MHz		
Application	IEEE 802.3an 10GBASE-T and Legacy speeds		
Length (M)	305		
Construction			
Conductor	Size	23Awg	
	Construction	Solid Bare Copper	
Insulation	Material	Polyolefin(PO)	
	Color Codes & Diameter	1.Blue × White	1.17 ± 0.02mm
		2.Orange × White	1.12 ± 0.02mm
		3.Green × White	1.15 ± 0.02mm
		4.Brown ×White	1.10 ± 0.02mm
Twisted	Description	Left hand direction	
Filler	Material	Polyolefin(PO)	
Assembly	Description	Left hand direction	
Rip Cord	Material	Polyester multi-yarn	
Jacket	Material	Flame retardant polyvinyl chloride(FRPVC)	
	Diameter	8.30 ± 0.2mm	
	Thickness	1.10 ± 0.1mm	
	Color	White	

Electrical & Physical Properties

Rating Temp. Voltage	75 °C 300V
Spark Test	2.5 KV DC
AC leakage current through overall jacket	≤10mA (1.5KV AC)
Cable Cold Bend	-20°C x 4HRS
Conductor DC Resistance	≤9.38 Ω/100m
Resistance Unbalance	4% Max.
Dielectric Strength	1.5KV AC for 2 s
Insulation Resistance	5000 MΩ.m Min.
Mutual Capacitance	5.6 nF/100m Max.
Capacitance unbalance	330 pF/100m Max.
Pair-to-ground	

The product specifications are subject to change without prior notice

ORDERING INFORMATION	
Model	Description
SP1106UM	Cat6A (U/UTP)Bulk Cable

Micronet Communications Inc.

E-mail: sales@micronet.com.tw; support@micronet.com.tw WEB: www.micronet.com.tw

Micronet®
Making Communication Easier



Cat6A (U/UTP) Bulk Cable
Model No. SP1106UM

COMPANION PRODUCTS
Consider the following Micronet products as a factor in your network planning.
Ethernet and PoE
Wireless LAN
Broadband • ADS & VDSL
Network Video Surveillance
Network / Server / Appliance
Network / Structured Cabling
Copyright 2015 Micronet Communications Inc. All technical information in this document is subject to change without prior notice. Micronet, EtherFast and MicroView are registered trademarks of Micronet Communications Inc. All other trademarks and registered trademarks are properties of their respective holders.

Distributed By: