



## 26-Port Gigabit Managed PoE switch

Model No. SP6526P




### Introduction

Micronet SP6526P is a 26-Port managed PoE switch with 24-Port 10/100/1000Mbps PoE and 2-Port Gigabit SFP supporting fiber expansion. It is compliant with IEEE802.3af/at, featuring up to 30 watts per port and 370 Watts total PoE power to fulfill most of the demanding network camera and other IT/network applications. With its PoE features such as PoE scheduling, auto-checking, configuring, and power delay, it helps you utilize PoE power more efficiently, smartly, and maximizes the power usage.

For more secured and smooth network, SP6526P is equipped with a long list of layer 2 & layer 3 management and security features such as VLAN, link aggregation, QoS, DHCP client and snooping, secure shell, secure sockets layer, IPv6, and more. With these features, you will have quick deployment, smooth and safe network; giving your infrastructure expansion with more functionality, security, and manageability for different network applications.

### Key Features

- **Provide 370W Total PoE Power**, with 24 PoE ports IEEE802.3af/at
- **Support automatic Voice VLAN** for quick deployment of VoIP, and IP-based surveillance system
- **Support Link Aggregation (IEEE 802.3ad)** to increase bandwidth by automatically aggregate several links together
- **Support QoS (Port-based/IEEE 802.1p)** feature to preserve network bandwidth and allow maximum control of network resources
- **Support STP ,Reserve STP (RSTP) and MSTP features** to ensure faster recovery from failed links and enhance overall network reliability
- **Support DHCP client and snooping, port mirroring ,and rate limiting features** to enhance network security.
- **Allow Telnet, and IPv6 Web interface (both HTTP and HTTPS) access**
- **Support Device Management System** to facilitate installation, configuration, and troubleshooting
- **Support IEEE 802.1Q VLAN-segmented broadcast domains** to reduce broadcast traffic and increase LAN security and performance
- **Support 802.3az Green-Ethernet** to save power usage
- **Support PoE Port configuration, scheduling, auto-checking, and power delay** to enhance power performance
- **Support Secure Shell (SSH) & Secure Sockets Layer (SSL/HTTPS)** for secure network management

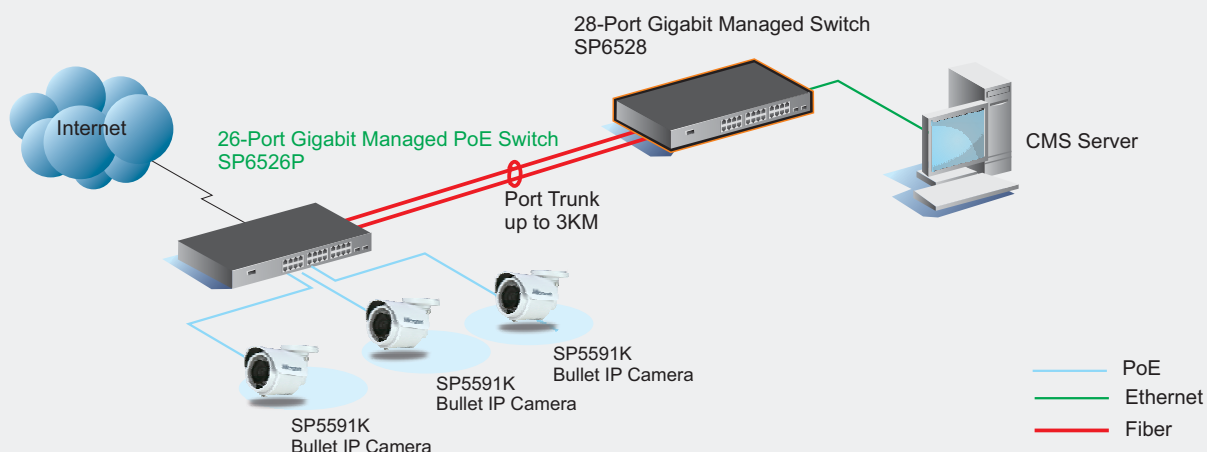

## SPECIFICATION AND PRODUCT FEATURES

Model	SP6526P	
Standard	IEEE802.3, 10Base-T IEEE802.3u, 100Base-TX/FX IEEE802.3ab, 1000Base-T	IEEE802.3z, 1000Base-SX/LX IEEE802.3az, Green Saving IEEE802.3af, 802.3at, PoE
Interface	24 x 10/100/1000M RJ45 Ports 2 x 1G SFP Slots	
Hardware	Min. MIPS(MHZ)-RTL8382M 500MHZ, Flash Memory/DRAM/Packet Buffer(MB):32/128/0.5125 Buffer Memory: 0.5125MB, Mac address:8K Jumbo Frame: 9216K Switching Capacity: 52Gbps, Forwarding Rate:38.68 Mpps	
L2 Feature	Auto Negotiation, Auto MDI/MDI-X, Back-Pressure for halfduplex mode IEEE802.3x, Flow Control IEEE802.3ad, Link Aggregation(LACP) Port Trunk (Static Link Aggregation) Protocol-based VLAN, Voice VLAN VLAN port isolation (PVE) IEEE802.1q, Tag-based VLAN, Q-in-Q (double tag) VLAN IGMP Snooping v1/v2, IGMP Querier/Proxy IEEE802.1d, STP, IEEE802.1w, RSTP, IEEE802.1s, MSTP MLD v1/v2 snooping, MVR DHCP L2 relay (Option 82)	
QoS	Priority Queues:8 Hardware Strict Port Priority Traffic classification based on IEEE 802.1p CoS, DSCP Supports WRR	
Security	IP Source Guard, RADIUS, TACACS+ Supports IEEE802.1x and MAC-based Authentication Mac Address/IP Filtering DHCP Snooping Storm Control, Loop Protection	
PoE	Port Configuration PoE Scheduling Auto-checking Power Delay	
Management	Cable Diagnostics, DHCP L2 relay (Option 82) Firmware Upgradable and down gradable via TFTP/HTTP Supports LLDP (IEEE802.1ab) SNMP(V1/V2/V3), RMON (groups 1, 2, 3, and 9) Port mirroring: one to one and many to one Event log: syslog Loop detection and prevention, UPnP Dual Image HTTPS/SSL/SSH Device Management System (DMS)-Graphical Monitoring/Traffic Monitoring/Trouble Shooting Ipv6 Management	
Environment	Operating: 0~50°C, Storage: -20~70°C Operating: 10~90% (Non-Condensing)	
Power	AC power 100 to 240 V, PoE power budget max. 370 watts	
Dimension	442 x 211 x 44 mm (W X D X H)	
Weight	3.13kg	
Emission	CE	


The product specifications are subject to change without prior notice

## ORDERING INFORMATION

Model	Description
SP6526P	26-Port Gigabit Managed PoE Switch
M363A	1000Base-SX SFP Transceiver, 550M
M363B-X	1000Base-LX SFP Transceiver, X=10/20/40 KM

Micronet Communications Inc.

E-mail: sales@micronet.com.tw; support@micronet.com.tw WEB: www.micronet.com.tw

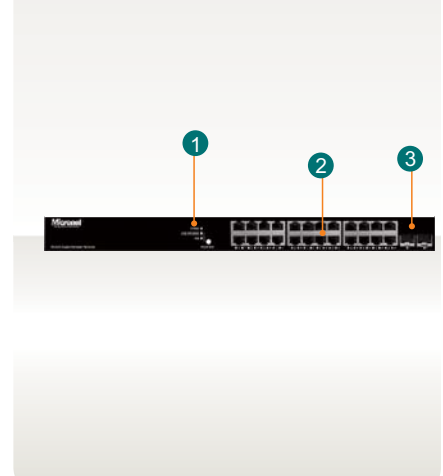

26-Port Gigabit Managed PoE Switch

Model SP6526P

- ① LED Indicator
- ② Gigabit RJ-45 Port
- ③ SFP Port

## COMPANION PRODUCTS

Consider the following Micronet products as a factor in your network planning.

Ethernet and PoE

Wireless LAN

Broadband · ADS & VDSL

Network Video Surveillance

Network / Server / Appliance

Network / Structured Cabling

Copyright 2015 Micronet Communications Inc.  
All technical information in this document is subject to change without prior notice. Micronet, EtherFast and MicroView are registered trademarks of Micronet Communications Inc. All other trademarks and registered trademarks are properties of their respective holders.

Distributed By :

